


# Machine Screw, Thread Cutting

Slotted Pan Head  
Inch - Type 23

Sample Part Number

4 - 40 x 1/2 SL - PN - 23 - STL - Z  
Thread Length Drive Series Material Finish

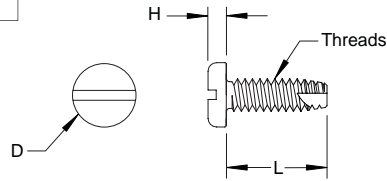

Thread	H Height	D Head Diameter
2 - 56	.053 / .045	.167 / .155
4 - 40	.068 / .058	.219 / .205
6 - 32	.082 / .072	.270 / .256
8 - 32	.096 / .085	.322 / .306
10 - 32	.110 / .099	.373 / .357
1/4 - 20	.144 / .130	.492 / .473

Custom sizes available.

Length	L
3/16	.187 / .167
1/4	.250 / .230
5/16	.313 / .293
3/8	.375 / .355
7/16	.438 / .418
1/2	.500 / .480
9/16	.563 / .533
5/8	.625 / .595
3/4	.750 / .720
7/8	.875 / .845
1	1.000 / .970
1.25	1.250 / 1.190
1.5	1.500 / 1.440
1.75	1.750 / 1.690
2	2.000 / 1.940

Material	Description
STL	Low Carbon Steel
SS	18 - 8 Stainless Steel

Finish	Description
Z - BLK	Zinc Black
Z	Zinc Clear

Other finishes available.

Drive	Description
 SL	Slotted


# Machine Screw, Thread Cutting

Slotted Pan Head  
Metric - Type 23

Sample Part Number

M4 x 10MM SL - PN - 23 - STL - Z  
Thread Length Drive Series Material Finish

ASME B18.6.5M\*\*

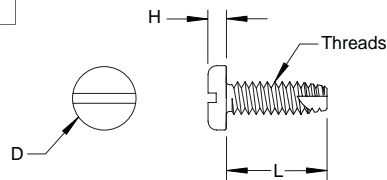

Thread	H Height	D Head Diameter
M2 x 0.4	1.3 / 1.1	4.0 / 3.7
M2.5 x 0.45	1.5 / 1.3	5.0 / 4.7
M3 x 0.5	1.8 / 1.6	5.6 / 5.3
M3.5 x 0.6	2.1 / 1.9	7.0 / 6.6
M4 x 0.7	2.4 / 2.2	8.0 / 7.6
M5 x 0.8	3.0 / 2.7	9.5 / 9.1
M6 x 1	3.6 / 3.3	12.0 / 11.5
M8 x 1.25	4.8 / 4.5	16.0 / 15.5
M10 x 1.5	6.0 / 5.7	20.0 / 19.4

Custom sizes available.

Length	L
4	4.0 / 3.2
5	5.0 / 4.2
6	6.0 / 5.2
8	8.0 / 7.2
10	10.0 / 9.2
12	12.0 / 11.2
16	16.0 / 15.2
20	20.0 / 19.2
25	25.0 / 23.8
30	30.0 / 28.8
35	35.0 / 33.8
40	40.0 / 38.8
45	45.0 / 43.5

Material	Description
STL	Low Carbon Steel
SS	18 - 8 Stainless Steel

Finish	Description
Z - BLK	Zinc Black
Z	Zinc Clear

Other finishes available.

Drive	Description
 SL	Slotted

\*\* EN ISO 1481 has slightly tighter tolerances.  
Contact Pencom for more information.