

# Fan Screws

## FEATURES

- Ideal for mounting fans to chasses or finger guards to fans.
- Hardened screws form threads in mild steel, aluminum and hard plastics.
- Reduced diameter point aligns multiple surfaces to be fastened.
- Variety of thread sizes, lengths and head styles available.



## MATERIALS AND FINISHES

- Heat treated carbon steel with attractive bright nickel finish.
- Other materials and/or finishes available by request.


## PART DESCRIPTION EXAMPLE

M3.9 x 12MM PH - FL - FAN - STL - NI



## DRIVE

Drive Code	Description	
PH	Cross-Recess	
TX	Six-Lobe Recess	

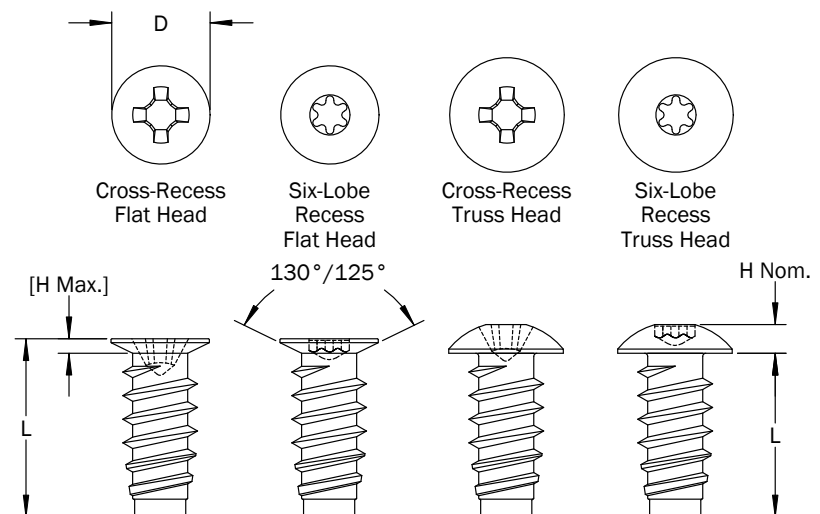

## HEAD

Head Code	Description
FL	Flat
TRUSS	Truss

## GENERAL

All dimensions in millimeters

Thread (Type B)	Thread Code	Rec. Hole Size	L Length	Length Code	Head Type							
					Flat				Truss			
					D Head Dia.	H Head Height Max. Ref.	Drive Size		D Head Dia.	H Head Height Nom.	Drive Size	
							Cross-Recess	Six-Lobe			Cross-Recess	Six-Lobe
M3.9 x 1.2	M3.9	3.34	10.3-10.7	10.5	5.35-5.56	1.12	2	T8	6.80-7.10	1.5	2	T15
			11.5-12.5	12	5.35-5.56	1.12	2	T8	6.80-7.10	1.5	2	T15
M4.2 x 1.4	M4.2	3.50	10.3-10.7	10.5	5.80-6.10	1.12	2	T8	7.10-7.40	1.7	2	T15
			11.5-12.5	12	5.80-6.10	1.12	2	T8	7.10-7.40	1.7	2	T15
M4.9 x 1.6	M4.9	4.20	10.3-10.7	10.5	6.35-6.65	1.18	2	T10	7.80-8.10	2.0	2	T20
			11.5-12.5	12	6.35-6.65	1.18	2	T10	7.80-8.10	2.0	2	T20

- 1) Optimum hole size may vary depending on materials joined. PENCOM recommends testing in the application to determine hole size and tightening requirements. Contact an Account Representative for samples.
- 2) Custom sizes available by request.