


# Machine Screw, Thread Cutting

82 Deg Undercut Flat Head  
Inch - Type 1

Sample Part Number

4 - 40 x 1/2 PH - UFL - 1 - STL - Z  
Thread Length Drive Series Material Finish

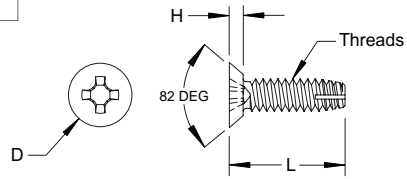

Thread	H Height	D Head Diameter	Drive Size Cross Recess
2 - 56	.036 / .028	.172 / .147	1
4 - 40	.047 / .038	.225 / .195	1
6 - 32	.059 / .048	.279 / .244	2
8 - 32	.070 / .058	.332 / .292	2
10 - 32	.081 / .068	.385 / .340	2
1/4 - 20	.107 / .092	.507 / .452	3



Custom sizes available.

Length	L
3/16	.187 / .167
1/4	.250 / .230
5/16	.313 / .293
3/8	.375 / .355
7/16	.438 / .418
1/2	.500 / .480
9/16	.563 / .533
5/8	.625 / .595
3/4	.750 / .720
7/8	.875 / .845
1	1.000 / .970
1.25	1.250 / 1.190
1.5	1.500 / 1.440
1.75	1.750 / 1.690
2	2.000 / 1.940

Material	Description
STL	Low Carbon Steel
SS	18 - 8 Stainless Steel

Finish	Description
Z - BLK	Zinc Black
Z	Zinc Clear

Other finishes available.

Drive	Description	
	PH	Cross Recess
	SL	Slotted