


Machine Screw

Indented Hex Washer Head with Serration

Inch

Sample Part Number

4 - 40 x 1/2 PH - INHX - SERR - WA - MS - STL - Z
Thread Length Drive Series Material Finish

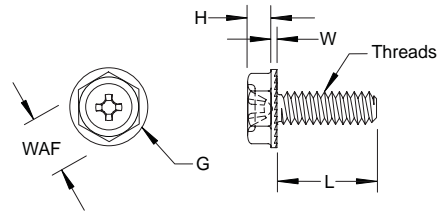

Thread	H Height	G Washer Outside Diameter	W Washer Thickness	WAF Width Across Flats	Drive Size Cross Recess
2 - 56	.050 / .040	.125 / .120	.016 / .010	.125 / .120	1
4 - 40	.060 / .049	.188 / .181	.019 / .011	.188 / .181	1
6 - 32	.093 / .080	.250 / .244	.025 / .015	.250 / .244	2
8 - 32	.110 / .096	.250 / .244	.031 / .019	.250 / .244	2
10 - 32	.120 / .105	.312 / .305	.031 / .019	.312 / .305	2
1/4 - 20	.190 / .172	.375 / .367	.050 / .030	.375 / .367	3




Custom sizes available.

Length	L
3/16	.187 / .167
1/4	.250 / .230
5/16	.313 / .293
3/8	.375 / .355
7/16	.438 / .418
1/2	.500 / .480
9/16	.563 / .533
5/8	.625 / .595
3/4	.750 / .720
7/8	.875 / .845
1	1.000 / .970
1.25	1.250 / 1.190
1.5	1.500 / 1.440
1.75	1.750 / 1.690
2	2.000 / 1.940

Material	Description
STL	Low Carbon Steel
SS	18 - 8 Stainless Steel

Finish	Description
Z - BLK	Zinc Black
Z	Zinc Clear

Other finishes available.

Drive	Description	
	PH	Cross Recess
	SL	Slotted
	USL	UnSlotted